
Commercial Laboratory Project 3

1/2" EMT Conduit Assignment

(90 Degree Bend)

- 1. Make each conduit bend from the measurements provided.
- 2. Conduit ends must be reamed to remove sharp edges.
- 3. Offsets are required at all box locations.
- 4. All measurements must be within 1/8 inches.
- 5. Work must in accordance with the National Electrical Code.
- 6. Label conduit with your name and submit to Instructor.

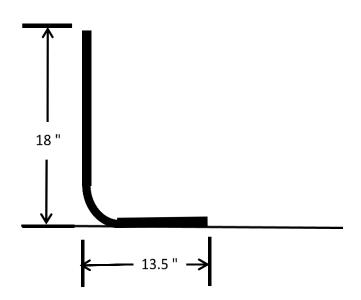

NAME:	, Date:
Doints Dossivad	Instructor's Initials
Points Received:,	Instructor's Initials:

Instructor's Remarks: